## Wireless FHD Kit

# 

#### **Features**

- Uncompressed 1080P Image Quality with 3D Support
- Cross-room Transmission (up to 30 meters, 100 feet)
- Smooth, Stable and Excellent Image Quality (Interference and Latency Free)
- Easy One-off Setup
- Auto Connection (Plug and play)
- Mount accessory for Receiver is included
- Power Supply to Receiver via Projector



### **Product Images**




Specifications			
Product Name	Wireless FHD Kit		
Model Name	WDP01		
Wireless Operating	4.9~ 5.9GHz (Include non-DFS and DFS Frequency		
Frequencies	Bands)		
Antenna	High performance internal antennas x 4		
System Latency	<1ms		
Audio Bit Rate Support	Up to 6 Mbps audio stream: Support AC3 and DTS 2 Channel PCM: 16~24 bits audio sample with 32~96KHz sampling rate		
Transmission Distance	The maximum video transmission range is 30 meters (100 feet)**		
Power Supply	100~ 240V AC in, 5V 2A DC out Power Adaptor		
Operating Temperature	0°~40°C		
UPC code / Part #	8400460-3143-5 / 5J.J9H28.A02		
Warranty	30 days DOA		
Compatible PRJ model	W7500, W1070, W1080ST, HT1075, HT1085ST		

Interface		Transmitter	Receiver
A/V	HDMI Input	X2	N/A
	HDMI Output	X1	X1
IR Control	IR Sensor	Yes	Yes
	IR Blaster Extender	Yes (2.5mm Jack)	N/A
	IR Sensor Extender	N/A	Yes
Switches	Power	Yes	Yes
	Source	Yes	Yes
LEDs	Power	X1 (Red/Blue)	X1 (Red/Blue)
	Source	X2 (Blue)	X2 (Blue)
	Signal Status	N/A	OSD displayed
Power	Input	5V DC Jack	5V mini USB
Dimensions (inch)		7.2"(W) x 3.8"(L) x 1.2"(H)	3.7"(W) x 3.7"(L) x 1.2"(H)

<sup>\*</sup> Transmission distance depends on actual environment. Stated distance is based on line-of-sight measurement. Structures constructed of steel wood, concrete, or brick may decrease transmission distance.

#### Package content

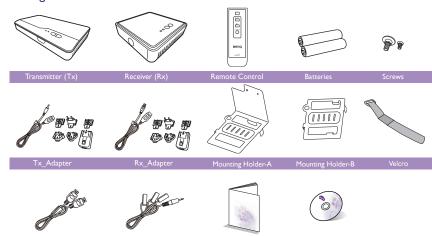



constructed of steel, wood, concrete, or brick may decrease transmission distance.

\*\* if more than one pair is in operation, each of transmitter and receiver should be at least 2 meters away from one another.