

Multimedia Projector

LV-7295

you can



The LV-7295, 2600 lumens XGA projector is ideal for the office or on the road.

The LV-7295 combines the performance of 2600 lumens output with versatile XGA resolution. Easy, eco-friendly operation & up to 6000 hours lamp life make it ideal for corporate & mobile applications.

XGA RESOLUTION
2600 LUMENS
2000:1 CONTRAST RATIO
1.2X ZOOM LENS
AUTO KEYSTONE CORRECTION
BUILT-IN 10W SPEAKER
6000 HOUR LAMP LIFE

Key features

- Native XGA resolution for crisp image detail
- 2600 lumens for bright, clear images
- High 2000:1 contrast ratio with Auto Iris, delivering deep blacks
- Canon wide-angle 1.2x zoom projection lens
- Easy Operation with Auto Input Search and Auto Vertical Keystone Correction
- Built-in audio with powerful 10W output, plus line-out terminal
- Eco-friendly operation: 6000 hour lamp life, 5500 hour filter life and less than 1W power consumption in standby (with network off and all in Eco mode)
- Direct Power On / Off
- Low noise: Just 29dBA in Eco Mode
- RJ-45 network port for remote monitoring and control

What's in the Box

LV-7295 Multimedia Projector, Remote Controller, AAA Batteries (x2), AC Mains Power Cable, Ferrite Core, VGA Computer Connection Cable, Lens Cap, PIN Code Label, Instruction Manual on CD-ROM, Important information and Quick Start Guide, Warranty Card

Dimensions (W x H x D)

334 x 101 x 247 mm

Weight

2.98 kg



PROJECTOR

Canon

LV-7295


Specifications



MULTIMEDIA PROJECTOR Product Class	Ultra-Portable
LCD PANEL Type Size and Number Aspect Ratio Native Resolution	Transmissive LCD, Poly-silicon TFT Active Matrix 0.55" diagonal, 3 panels 4:3 1024 x 768 (XGA), 786432 pixels
OPTICS Lamp Type Lens F Number and Focal Length Zoom Magnification and Control Focus Control Lens Shift	215W NSHA F2.0 - F2.15; f=18.4 - 22.0mm 1.2x Manual Manual 6 : 1 (fixed)
IMAGE AND AUDIO Brightness Brightness Uniformity Contrast Ratio Projection Distance Coverage Screen Size Digital Zoom Magnification Keystone Correction Range Analogue RGB Compatibility Component Video Scan Systems Video / S-Video Colour Systems Display Modes Built-in Speaker	2600 lumens 85% 2000:1 (Auto Iris and Lamp dimmer functions enabled) 1.3m - 11.8m (3.3m - 3.9m for 100" image) 40" - 300" (80 x 60cm - 610 x 457cm) 0.5x to 4x Vertical: +/- 30° (Manual); +/- 20° (Auto) (WUXGA/UXGA/WXGA/SXGA+/SXGA) / XGA / SVGA / VGA / MAC 1080i / 1035i / 720p / 575p / 575i / 480p / 480i PAL / PAL-M / PAL-N / NTSC / NTSC4.43 / SECAM Presentation, Standard, High Contrast, Cinema, Blackboard (Green), Colour board (Red, Blue, Yellow, Green), User 1-4 10.0W RMS, Monaural

PORTS AND CONNECTORS Analogue RGB Input 1 Analogue RGB Input 2 Analogue RGB Output S-Video Input Composite Video Input Audio Input 1 Audio Input 2 Audio Input 3 Audio Output Service Port / Projector Control Network Port	Mini D-Sub 15-pin (Component Video via optional cable / S-Video via optional cable) Mini D-Sub 15-pin (shared with RGB output) Mini D-Sub 15-pin (shared with RGB input 2) Mini D-Sub 15-pin (Shared with RGB input 1, via optional cable) RCA x1 3.5mm stereo mini-jack (input for RGB / Microphone) RCA x2 (L/R) (input for Video) - 3.5mm stereo mini-jack (variable level) Mini D-Sub 9-pin (RS-232c) RJ-45
MECHANISMS Front Elevation Mechanism	1x Mechanical foot, 10° maximum image elevation
RATINGS Dimensions (W x H x D) Weight Power Source Power Consumption Noise Level Operating Environment Storage Environment Warranty	334mm x 101mm x 247mm 2.98 kg 100V - 240V AC, 50/60Hz Normal Mode: 252W / High Mode: 271W / Eco Mode: 187W Standby: 8.5W / Standby (LAN off): 0.7W Normal Mode: 34.4dBA / Eco Mode: 29dBA +5°C to +35°C -10°C to +60°C 3 years
All data is based on Canon's standard testing method. This Leaflet and the specifications of the product have been developed prior to the date of product launch. Specifications are subject to change without notice. ™ and ©: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.	

Connectivity

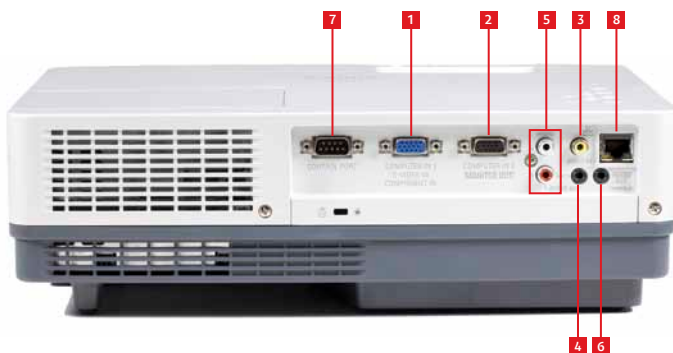

- 1 **Mini D-Sub 15-pin:** Analogue RGB Input 1, (Component Input / S-Video Input with optional adapter cable)
- 2 **Mini D-Sub 15-pin:** Analogue RGB Input 2 / Analogue RGB (Monitor) Output
- 3 **RCA x1:** Composite Video Input
- 4 **3.5 mm mini-jack:** Stereo Audio Input 1 (for RGB inputs 1 & 2) / Microphone Input
- 5 **RCA x2 (L/R):** Stereo Audio Input 2 (for Composite Video Input)
- 6 **3.5 mm mini-jack:** Stereo Audio Output (Variable level)
- 7 **Mini D-Sub 9-pin:** Control Port (RS-232c)
- 8 **RJ-45:** Network Connection