



## Model Name **MX703 Digital Projector**

### Unique selling point

- \* SmartEco Power Saving technology
- \* 3000AL High Brightness
- \* Up to 6500hours Long lamp life
- \* <0.5W standby mode
- \* Various 3D format for entertainment
- \* LAN control function

### Trade Mark




<b>Projection System</b>	DLP	
<b>Native Resolution</b>	XGA(1024 x 768)	
<b>Brightness</b>	3000AL	
<b>Contrast Ratio</b>	13000:1	
<b>Display Color</b>	1.07 Billion Colors	
<b>Lens</b>	F2.54-2.73, f=18.18-21.84mm	
<b>Aspect Ratio</b>	Native 4:3 (5 aspect ratio selectable)	
<b>Throw Ratio</b>	1.64-1.97 (60°@ 2m)	
<b>Image Size (Diagonal)</b>	45"~300"	
<b>Zoom Ratio</b>	1.2:1	
<b>Lamp Type</b>	210W	
<b>Lamp(Normal/Economic/SmartEco Mode)*</b>	4500/6000/6500 hours	
<b>Keystone Adjustment</b>	1D, Vertical +/- 40 degrees	
<b>Projection Offset</b>	110% ±5%	
<b>Resolution Support</b>	VGA(640 x 480) to UXGA(1600 x 1200)	
<b>Horizontal Frequency</b>	15~102KHz	
<b>Vertical Scan Rate</b>	23~120Hz	
<b>Compatibility</b>	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
<b>Interface</b>	Computer in (D-sub 15pin)	x 2(Share with component)
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI	x1
	Audio in (Mini Jack)	x 2
	Audio in (L/R)	x1
	Audio out (Mini Jack)	x 1
	Speaker	10W x 1
	USB (Type mini B)	x1 (Download & page/down)
	RJ45	x1(LAN control)
	RS232 (DB-9pin)	x 1
	IR Receiver	x2 (Front+rear)
<b>Dimensions</b>	Dimensions(W x H x D)	287.3 x 114.4 x 232.6 mm
	Weight	2.4kg(5.28lbs)
<b>Power</b>	Power Supply	AC100 to 240 V, 50 to 60 Hz
	Power Consumption	306W(typical), Standby<0.5W
<b>Audible Noise</b>	33/28 dBA (Normal/Economic mode)	
<b>On-Screen Display Languages</b>	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
<b>Picture Modes</b>	Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2	
<b>Accessories</b>	<b>Standard</b>	<b>Optional</b>
	Lens Cover	Presentation Plus 5JJ9301.001
	Remote Control w/ Battery	Spare Lamp Kit 5JJ6V05.001
	Power Cord (by region)	Ceiling Mount 5JJ4N10.001
	User Manual CD	3D Glasses 5JJ7K25.001
	Quick Start Guide	Carry bag 5JJ3T09.001
	Warranty Card (by region)	
	VGA(D-sub 15pin) Cable	

\*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



# MX703 Digital Projector

## Distance Chart

Screen size				Projection distance (mm)			Vertical offset (mm)
Diagonal		W (mm)	H (mm)	Min distance (max. zoom)	Average	Max distance (min. zoom)	
Inch	mm						
40	1016	813	610	1333	1467	1600	30
50	1270	1016	762	1667	1833	2000	38
60	1524	1219	914	2000	2200	2400	46
70	1778	1422	1067	2333	2567	2800	53
80	2032	1626	1219	2667	2933	3200	61
90	2286	1829	1372	3000	3300	3600	69
100	2540	2032	1524	3333	3667	4000	76
120	3048	2438	1829	4000	4400	4800	91
150	3810	3048	2286	5000	5500	6000	114
200	5080	4064	3048	6667	7333	8000	152
250	6350	5080	3810	8333	9167	10000	191
300	7620	6096	4572	10000	11000	12000	229

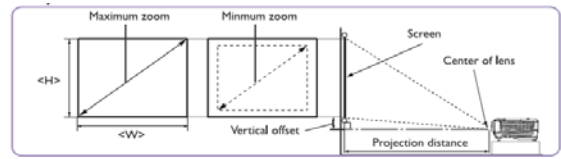

## Wall mount/Ceiling mount Chart

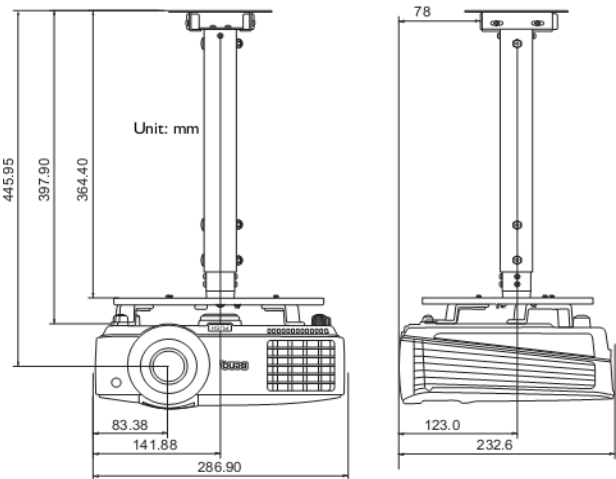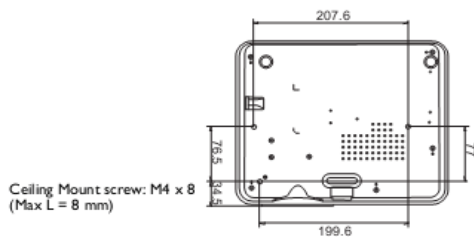

## Dimension

