

Multimedia Projector

LV-X300



The bright, clear and easy-to-operate XGA portable projector with digital input.

Project bright, detailed images in classic 4:3 aspect ratio with the LV-X300. Reliable and quiet in operation, the projector features XGA resolution, an HDMI input and compact dimensions.

Key features

- Enjoy precise, accurate images in classic XGA resolution (1024 x 768 pixels)
- Deliver bright, vivid projections with 3000 lumens brightness and 2300:1 contrast ratio
- 1.1x zoom lens allows flexible projector placement
- Compact and lightweight: just 2.5kg
- Vertical keystone correction
- 5000h lamp life (6000h in Eco Mode)
- HDMI™ port and 2 x VGA ports
- RJ-45 network port for remote control and monitoring
- Built-in 10W speaker

What's in the box

Multimedia Projector LV-X300, Remote Controller, Battery, AC Mains Power Cable, Computer Connection Cable, Instruction Manual on CD-ROM, Important Information and Quick Start Guide, Warranty Document

Dimensions (W x H x D)

282 mm x 115 mm x 232 mm

Weight

2.5 kg

LV-X300


Specifications



MULTIMEDIA PROJECTOR Product Class	Ultra-Portable
LCD PANEL Type Size and Number Aspect Ratio Native Resolution	Reflective DLP™ chip 0.55" diagonal, Single chip 4:3 1024 x 768 (XGA), 786432 pixels
OPTICS Lamp Type Lens F Number and Focal Length Zoom Magnification and Control Focus Control Lens Shift	190W P-VIP F2.56 - F2.8; f=21.0 - 23.1mm 1.1x Manual Manual 60% (fixed)
IMAGE AND AUDIO Brightness Brightness Uniformity Contrast Ratio Projection Distance Coverage Screen Size Projection Ratio Digital Zoom Magnification Keystone Correction Range Digital RGB Compatibility Analogue RGB Compatibility Digital Video Scan Systems Component Video Scan Systems Video / S-Video Colour Systems Display Modes Built-in Speaker	3000 lumens (2100 Lumens Eco mode) 80% 2300:1 (with lamp control) 2.27m - 5.67m (3.78m to 4.15m for 100" image) 60" - 150" (122 x 91cm - 305 x 229cm) 1.86:1 - 2.04:1 2x maximum Vertical: Manual +/-30° (UXGA / SXGA+ / WXGA+ / FWXGA) / WXGA / SXGA / XGA / SVGA / VGA (UXGA / SXGA+ / WXGA+ / FWXGA) / WXGA / SXGA / XGA / SVGA / VGA / MAC 1080p / 1080i / 720p / 576p / 480p 1080p / 1080i / 720p / 576p / 576i / 480p / 480i PAL / PAL-M / PAL-N / PAL-60 / NTSC / NTSC4.43 / SECAM Presentation, Standard, sRGB, Movie, User 1 & 2 10W RMS, Monaural

PORTS AND CONNECTORS Digital RGB / Digital Video Input Analogue RGB Input 1 Analogue RGB Input 2 S-Video Input Composite Video Input Audio Input Audio Output Projector Control Network Port Service Port	HDMI™ V1.3 Mini D-Sub 15-pin (Component Video via optional cable) Mini D-Sub 15-pin (Component Video via optional cable) Mini DIN 4-pin RCA x1 3.5mm stereo mini-jack 3.5mm stereo mini-jack (variable level) Mini D-Sub 9-pin (RS-232C) RJ-45 (100BASE-TX / 10BASE-T) USB Type B
MECHANISMS Front Elevation Mechanism Rear Adjustment Mechanism	1x Mechanical foot, 6° maximum image elevation 1x Mechanical foot
RATINGS Dimensions (W x H x D) Weight Power Source Power Consumption Noise Level Operating Environment Warranty	282 mm x 115 mm x 232 mm (including protrusions) 2.5 kg 100V - 240V AC, 50/60Hz Normal Mode: 330W / Eco Mode: 275W / Standby: 3W, Standby (LAN off): 0.5W Normal Mode: 35dBA / Eco Mode: 29dBA 0°C to +40°C 3 years
All data is based on Canon standard testing methods except where indicated. Subject to change without notice. ™ and ®: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.	

Connectivity

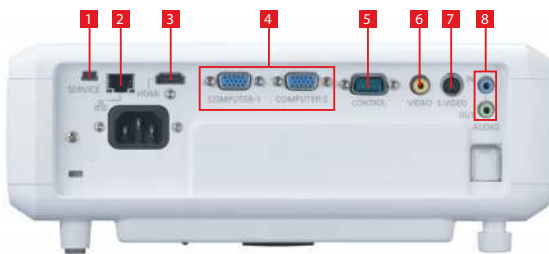

- 1 USB type B: Service port
- 2 RJ-45: Network connection (100BASE-TX / 10BASE-T)
- 3 HDMI: HDMI input
- 4 Mini Dsub 15 x2: Analog PC input / Component video input
- 5 Dsub9: RS232C connection
- 6 RCA: Video input
- 7 Mini DIN4: S-video input
- 8 Mini jack x2: Audio input x1, Audio output x1



For more information visit
canon.com.au/projectors
call 1800 021 167 or email
specialised.imaging@canon.com.au

canon.co.nz
call 0800 222 666