

Cost-effective LCD projector captures attention in classrooms or conference rooms with dynamic images and 2,700 ANSI lumens.



Key Features

- XGA 1024 x 768 resolution
- 2,700 ANSI lumens white/color output
- 16W audio output
- 2,000:1 contrast ratio
- HDMI x 1 input
- 10,000 hours lamp life (Eco-2 mode)*
- 5,000 hours unwoven filter**

From the classroom to the conference room, Hitachi's cost-effective CP-EX252N LCD projector combines superior image clarity, high quality value, and long-life reliability. Bright, vivid colors with razor-sharp text and bold graphics will truly enhance any lesson or meeting and make it more memorable. For added security, the CP-EX252N includes PIN lock protection which can limit projector users. An MS-1WL wireless multifunction switcher is available for the CP-EX252N and operates in conjunction with the receiver to provide expanded source selection and switching options for connected devices. Plus, Hitachi's Intelligent Eco Mode with ImageCare combines optimal picture performance with maximum energy savings for a lower total cost of ownership. For added peace of mind, Hitachi's CP-EX252N is also backed by a generous warranty and our world-class service and support programs.

CP-EX252N

FEATURES

ImageCare Technology

ImageCare ImageCare is a lamp power control function that combines optimal picture performance with maximum energy savings by decreasing energy usage, improving contrast ratio and lengthening lamp life. The result is a lower total cost of ownership and decreased maintenance cost.

Intelligent Eco and Saver Modes



Automatically changes the brightness of the lamp according to the brightness level of the screen. Also, automatically changes the brightness of the lamp if there is no change in the screen image. Using ImageCare technology, these features give optimal picture performance with maximum energy savings.

PIN Lock / MyScreen / MyText



PIN lock protection can limit projector users. MyScreen PIN lock keeps captured images on the startup screen. Users can set any name logo to MyScreen, clearly identifying ownership. MyText provides the ability to write text on the startup screen such as model name, serial number or location.

Network Control, Maintenance and Security



Embedded networking gives you the ability to manage and control multiple projectors over your LAN. Features include scheduling of events, centralized reporting, and e-mail alerts for reactive and routine maintenance.



Front View



Top View




Left Profile



Right Profile

Input/Outputs

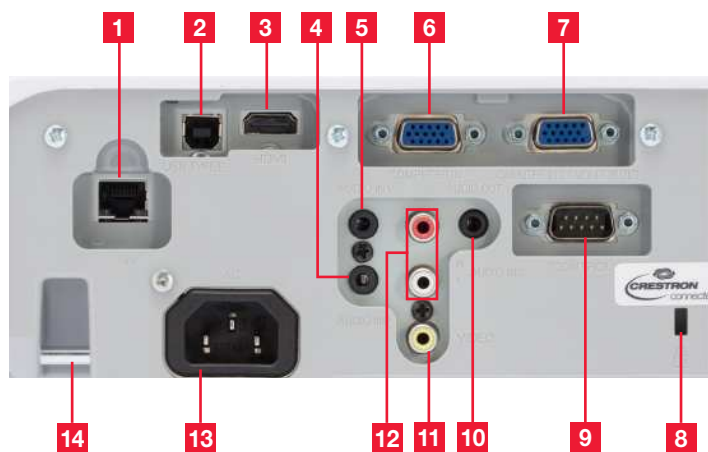

1. LAN
2. USB Type B
3. HDMI
4. Audio in 2
5. Audio in 1

6. Computer in 1
7. Computer in 2/Monitor Out
8. Kensington Lock
9. Control (RS-232C)
10. Audio Out

11. Video
12. Audio in 3
13. AC
14. Security Bar

CP-EX252N

HI0509-Rev.1-11/16
All specifications subject to change without notice.
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.
©2016 Hitachi America, Ltd. All Rights Reserved.

Hitachi America, Ltd.

Toll Free: 1.800.HITACHI • Email: dmd.info@hal.hitachi.com
Web: hitachi-america.us/projectors



Accessories and Lenses

| | |
|-----------------------------|---|
| Supplied Accessories | Remote control, power cord, computer cable, 2 AA batteries, user's manual CD, user's manual |
| Optional Accessories | NA |
| Optional Lenses | NA |
| Replacement Parts | |
| Lamp | DT01481 with filter |
| Remote Control | HL03031 |
| Filter | UX38841 |

Projection Throw Chart

| Screen Size 4:3 | | Throw Distance | |
|-----------------|-------|----------------|-----|
| Diagonal | Width | Min | Max |
| 30 | 24 | 34 | 41 |
| 60 | 48 | 70 | 84 |
| 80 | 64 | 94 | 113 |
| 100 | 80 | 118 | 142 |
| 200 | 160 | 237 | 285 |
| 300 | 240 | 357 | 428 |

Throw Ratio: 1.5 - 1.8 : 1 (distance : width)
Screen size and throw distance are measured in inches.

Specifications

| | | |
|--------------------|--|--|
| Display | Projection Technology | 3LCD, 3 chip technology |
| | Resolution | XGA - 1024 x 768 |
| | White Light Output | 2,700 ANSI lumens |
| | Color Light Output | 2,700 ANSI lumens |
| | Colors | 16.7 million colors |
| | Aspect Ratio | Native 4:3 and 14:9 / 16:9 / 16:10 compatible |
| | Contrast Ratio | 2,000 : 1 (using active IRIS) |
| | Throw Ratio (distance : width) | 1.5 - 1.8 : 1 |
| Lens & Operation | Focus Distance | 35" - 429" |
| | Display size | 30" - 300" |
| | Lens | f = 19 - 23 mm, x 1.2 manual zoom and focus |
| | Lamp Wattage | 225W |
| | Expected Lamp Life* | Approximately 5,000 hours (standard mode) 10,000 hours (Eco-2 mode) |
| Compatibility | Expected Filter Life** | Approximately 5,000 hours |
| | Speaker Output | 16W |
| | Keystone | V: +/- 30° |
| | Computer | VGA, SVGA, XGA, WXGA/ WXGA+/SXGA/SXGA+/UXGA (compressed), MAC16" |
| | H-Sync | 15 kHz - 106 kHz |
| Connectors | V-Sync | 50 Hz - 120 Hz |
| | Composite Video | NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM |
| | Component Video | 480i, 480p, 576i, 720p, 1080i, 1080p |
| | HDMI | 480i, 480p, 576i, 720p, 1080i, 1080p, Computer signal TMDS clock 27 MHz - 150 MHz |
| | Digital Input | HDMI x 1 (HDCP compliant) |
| | Computer Input 1 | 15-pin mini D-sub x 1 (shared with analog component video input) |
| | Computer Input 2 | 15-pin mini D-sub x 1 (shared with analog component video input and monitor output) |
| | Computer Monitor Output | 15-pin mini D-sub x 1 (shared with analog computer Input 2 and analog component video input) |
| | Video Input | |
| | Composite Video | RCA jack x 1 |
| Ratings & Warranty | Component Video | 15-pin mini D-sub x 2 (shared with computer in 1, in 2/monitor out) |
| | Audio Input | 3.5 mm stereo mini jack x 2, RCA jack (L/R) x 1 |
| | Audio Output | 3.5 mm stereo mini jack x 1 |
| | Network LAN Wired | RJ-45 port |
| | Network LAN Wireless | N/A |
| | USB | Type B x 1 (mouse control) |
| | Control Terminals | 9-pin D-sub x 1 (RS-232 control) |
| | Power Supply | AC100-120V / AC220-240V, 50/60Hz |
| | Power Consumption | 330W / 310W |
| | Operating Temperature | 41°F - 95°F (5°C - 35°C) |
| | Dimensions (W x D x H) | 12.6" x 9.7" x 3.4" (excl. protruding parts) |
| | Weight | Approximately 6.8 lbs. |
| | Approvals | UL 60950-1 / cUL FCC Part 15 subpart B class B |
| | Warranty | 3 year limited parts and labor Extended Service Contract available (additional cost) |

* Actual lamp life will vary by individual lamp based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

** Actual filter life will vary by individual filter based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.

