

# Multimedia Projector

## LV-7292A



The XGA LV-7292A is ideal in classrooms, laboratories and other education spaces.

The LV-7292A offers XGA resolution, 2200 lumens, HDMI™ and powerful 10W audio. It is ideal for corporate and education environments requiring high performance, easy setup and reduced running costs.

XGA RESOLUTION
2200 LUMENS
2000:1 CONTRAST RATIO
1.2x ZOOM LENS
AUTO SETUP
BUILT-IN 10W SPEAKER
6000 HOUR LAMP LIFE

### Key features

- Native XGA resolution (1024 x 768 pixels) for crisp image detail
- 2200 lumens delivering bright, clear images
- High 2000:1 contrast ratio with Auto Iris, for deep blacks and vivid colours
- Canon wide-angle 1.2x zoom projection lens
- Easy operation with Auto Input Search and Auto Vertical Keystone Correction
- HDMI™ input for clear images from digital sources
- Built-in audio with powerful 10W output, plus line-out terminal
- Sustainable Features: 6000 hour lamp life, 5500 hour filter life and less than 1W power consumption in standby (with network off and all in Eco Mode)
- Low Noise: Just 29dBA in Eco Mode
- RJ-45 network port for remote monitoring and control

### What's in the Box

LV-7292A Multimedia Projector, Remote Controller, AAA Batteries (x2), AC Mains Power Cable, Ferrite Core, VGA Computer Connection Cable, Lens Cap with Strap, PIN Code Label, Instruction Manual on CD-ROM, Important Information and Quick Start Guide, Filter Cover for Ceiling Mount, Warranty Card

### Dimensions (W x H x D)

334 x 101 x 247 mm

### Weight

3.0 kg



# Canon

# LV-7292A


## Specifications



<b>MULTIMEDIA PROJECTOR</b> Product Class	Ultra-Portable
<b>PANEL</b> Type Size and Number Aspect Ratio Native Resolution	Transmissive LCD, Poly-silicon TFT Active Matrix 0.55" diagonal, 3 panels 4:3 1024 x 768 (XGA), 786432 pixels
<b>OPTICS</b> Lamp Type Lens F Number and Focal Length Zoom Magnification and Control Focus Control Lens Shift	215W NSHA F2.00 – F2.15; f=18.38 – 22.06mm 1.2x Manual Manual 6 : 1 (fixed)
<b>IMAGE AND AUDIO</b> Brightness Brightness Uniformity Contrast Ratio Projection Distance Coverage Screen Size Digital Zoom Magnification Keystone Correction Range Digital RGB Compatibility Analogue RGB Compatibility Digital Video Scan Systems Component Video Scan Systems Video / S-Video Colour Systems Display Modes Image Enhancement Built-in Speaker	2200 lumens 85% 2000:1 (Auto Iris enabled & lamp dimmer function) 1.3m – 11.8m (3.3m – 3.9m for 100" image) 40" – 300" (813 x 610mm – 6096 x 4572mm) 0.5x – 4x Vertical: Manual +/-30° ; Auto +/-20° (WUXGA/UXGA/WXGA/SXGA+/SXGA) / XGA / SVGA / VGA (WUXGA/UXGA/WXGA/SXGA+/SXGA) / XGA / SVGA / VGA / MAC 1080p / 1080i / 720p / 575p / 480p 1080i / 1035i / 720p / 575p / 575i / 480p / 480i PAL / PAL-M / PAL-N / NTSC / NTSC4.43 / SECAM Presentation, Standard, High Contrast, Cinema, Blackboard (green), Colour board (red, blue, yellow, green), User 1 – 4 10-bit Colour Reproduction (1.07 billion colours) or 8-bit (16.7 million colours) for analogue RGB 10.0W RMS, Monaural

<b>PORTS AND CONNECTORS</b> Digital Video and Audio Input Analogue RGB Input 1  Analogue RGB Input 2 Analogue RGB Output S-Video Input Composite Video Input Audio Input 1 Audio Input 2 Audio Input 3 Audio Output Service Port / Projector Control Network Port	HDMI™ V1.3 (with Deep Colour) Mini D-Sub 15-pin (Component Video via optional cable / S-Video via optional cable / SCART-RGB via optional cable) - - Mini D-Sub 15-pin (Shared with RGB input 1, via optional cable) RCA x1 3.5mm stereo mini-jack (input for RGB 1 / Microphone) RCA x2 (L/R) (input for Composite Video) - 3.5mm stereo mini-jack (variable level) Mini D-Sub 9-pin (RS-232c) RJ-45
<b>MECHANISMS</b> Front Elevation Mechanism Rear Adjustment Mechanism	1x Mechanical foot, 10° maximum image elevation -
<b>RATINGS</b> Dimensions (W x H x D) Weight Power Source Power Consumption  Noise Level Operating Environment Storage Environment Warranty	334mm x 101mm x 247mm 3.0kg 100V – 240V AC, 50/60Hz Lamp Mode – High / Normal / Eco: 250W / 225W / 185W Standby: 9.6W / Standby (LAN off): 0.5W Lamp Mode – High / Normal / Eco: 36.4dBA / 34.4dBA / 29.0dBA +5°C to +35°C -10°C to +60°C 3 years
All data is based on Canon's standard testing method. This Leaflet and the specifications of the product have been developed prior to the date of product launch. Specifications are subject to change without notice. ™ and ©: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.	

## Connectivity

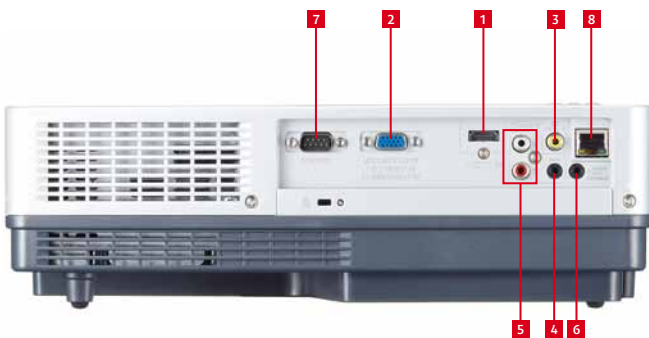

- 1 HDMI™ V1.3 (with Deep Colour):** Digital Video / Digital Audio / Digital RGB input.
- 2 Mini D-Sub 15-pin:** Analogue RGB Input 1 / Component Input (with optional adapter cable) / S-Video Input (with optional adapter cable) / SCART RGB Input (with optional adapter cable).
- 3 RCA x1:** Composite Video Input.
- 4 3.5mm mini-jack:** Stereo Audio Input 1 (for PC or Video equipment connected to port 2) / Microphone Input.
- 5 RCA x2 (L/R):** Stereo Audio Input 2 (for Composite Video Input).
- 6 3.5mm mini-jack:** Stereo Audio Output (Variable level).
- 7 Mini D-Sub 9-pin:** Control Port (RS-232c).
- 8 RJ-45:** Network Connection.

